




CITIBUS

Manufactured by Anadolu Isuzu
The one and only "Isuzu Manufacturing Management (IMM)" certified Isuzu factory in Europe.

TECHNICAL SPECIFICATIONS

Dimensions (mm)	
Maximum Length	9515
Maximum Width	2409
Maximum Height	3117 (w A/C)
Wheelbase	4435
Front Overhang	2135
Rear Overhang	2945
Weights (kg)	
Gross Vehicle Weight	13500
Engine	
Model	CUMMINS B4.5E6D210B
Type	Commonrail Turbo Diesel Intercooler
Number of Cylinders	4
Displacement (cc)	4500
Maximum Power (kw(PS)/rpm)	157 (211) / 2300
Maximum Torque (Nm/rpm)	850 /1200-1500
Emission Standard	Euro VI OBD-D
Transmission	
Model	AT: Allison T 280 R
Number of Gears	6 Forward, 1 Reverse; Overdrive
Steering System	
Tyres	
Tyre Sizes	265/70 R19,5
Suspension	
Front	Independent Air Suspension - 2 Air Bellows
Rear	Air Suspension - 4 Air Springs
Anti Roll Bar	S
Kneeling System	S (ECAS)
Brake System	
Front / Rear	Disc / Disc
System	Full Air Brake System with EBS and ABS, Dual Circuit, Auto-Adjusted
Parking Brake	Air Actuated Acted on the Rear Axle
Auxiliary Brake	Retarder
Fuel Tank	
Fuel Tank Capacity (lt)	215
Adblue Tank (lt)	30
Electrical System	
Battery	24V (2X12V) - 150 Ah
Passenger Capacity*	
Maximum Passenger Capacity	76 Passengers
Standard Layout	25 Seated (1 Foldable) + 43 Standing (3 Doors) 25 Seated + 47 Standing (2 Doors)

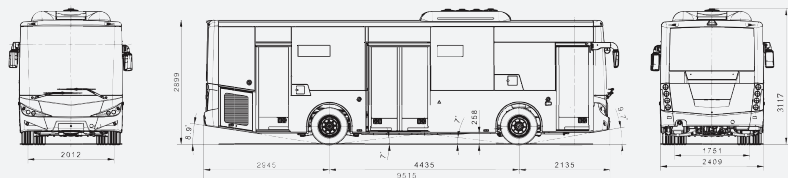

EQUIPMENTS

Heating and Ventilation	
Pre Heater	Opt
Fan Heater	S (front, middle and rear)
Air Conditioner	
Digital Air Conditioner	S
A/C Dashboard Nozzle Diffuser for Driver	S
Tropical A/C	Opt
Safety & Driving Comfort	
Speed Limitor	Opt
Tachograph	S
ABS	S
ASR	S
EBS	S
Bus Stop Brake (BSB)	S
Retarder	S
Spare Wheel	S
Roof Hatch for Ventilation & Emergency Exit	S
Reverse Gear Warning Beeper	S
Fire Extinguisher	S
Engine Compartment Fire Detection System	S
Engine Compartment Fire Detection and Automatic	
Fire Supression System	Opt
Fog Lamps	S (Front and Rear)
Rear View Camera	Opt
Front View Camera	Opt
Interior Camera	Opt
Exterior	
Metallic Paint	Opt
Towing Device	S (Front)
Doors	
Number of Service Doors	3 Doors (S), 2 Doors (Opt)
Type of Service Doors	Front: Single Wing Air Power Actuated Inside Opening Mechanism Middle: Double Wing Air Power Actuated Inside Opening Mechanism Rear: Single Wing Air Power Actuated Inside Opening Mechanism (3 doors) S (Middle Door With Sensor)
Wheelchair / Strollers Ramp	S
Remote Control	
Windows	
Passenger Windows	One Piece 1/3 Sliding Window on Each Side, Single Glazed (S) Double Glazed (Opt) Double Glazed (S) Sliding, Single Glazed With Heater (S) Windshield Blind (S), Driver Curtain (Opt)
Interior	
Driver Seat	
Driver's Seat	Ergonomic, Air Operated, Adjustable
Electrically Controlled and Heated Side Mirrors	Heated (S), Electrically Controlled (Opt)
Ticket Validator Preperation	Opt
USB Charger for Driver	S
Passenger Compartment	
Backrest (for Standing Passengers)	S
USB Charger for Passangers	Opt
Lightening & Signalization	
Interior Ceiling Lighting	S (Continuous Type With LED)
Digital Destination Display	Slither Route Display (S), Rear Route Indicator Panel (S), Colored Front Route Indicator Panel (Opt)
Audio & Visual	
Radio & MP3	Radio (S), MP3 (Opt)
DVD	Opt
Monitor / LCD Screen (Passenger Compartment)	Opt (Front, Side, Rear)
Digital Clock	S

S: Standard Opt: Optional

* Different seating variations are available.