



# ISUZU CITI PORT 12 CNG



---

Manufactured by Anadolu Isuzu  
The one and only "Isuzu Manufacturing Management (IMM)" certified Isuzu factory in Europe.

# ISUZU CITIPORT 12 CNG

## TECHNICAL SPECIFICATIONS

<b>Dimensions (mm)</b>	
Maximum Length	12030
Maximum Width	2550
Maximum Height	3400 (Including CNG tanks)
Wheelbase	5850
Front Overhang	2700
Rear Overhang	3480
<b>Weights (kg)</b>	
Gross Vehicle Weight	18700
<b>Engine</b>	
Model	CUMMINS L9NE6DII320B
Type	CNG Turbocharged
Number of Cylinders	6
Displacement (cc)	8900
Maximum Power (kw(HP)/rpm)	239 (320) / 2000
Maximum Torque (Nm/rpm)	1356 /1300-1400
Emission Standard	Euro VI OBD-D
<b>Transmission</b>	
Model	ZF 6 AP 1400 EMF
Number of Gears	6 Forward, 1 Reverse
<b>Steering System</b>	
	Hydraulic and Adjustable Dashboard and Steering
	Wheel Column in Height and Inclination
<b>Tyres</b>	
Tyre Sizes	275/70 R22,5
<b>Suspension</b>	
Front	Air Suspension - 2 Bellows Independent Suspension Electronically Controlled (ECAS)
Rear	Air Suspension - 4 Bellows Electronically Controlled (ECAS)
Anti Roll Bar	S
Kneeling System (ECAS)	S
<b>Brake System</b>	
Front / Rear	Disc / Disc
System	Full Air Brake System With EBS (Automatic Oil, Water Separator System is Optional) Air Actuated Acted on Rear Axle Intarder (Retarder is Integrated to Transmission)
Parking Brake	
Auxiliary Brake	
<b>Fuel Tank</b>	
Gas Tanks Capacity (L)	S 1470 L (5x294 L), Opt 1175 L (5x235 L) **
Gas Filling Port	Compatible with NGV2 (Both side of vehicle)
<b>Electrical System</b>	
Battery	24V - 2 x 240 Ah
<b>Passenger Capacity*</b>	
Standard Layout	27 (24fixed+3foldable) Passenger Seats + 1driver's Seat (Maximum 65 Standing Passengers When Foldable Seats Are Closed) (S)
Layout with Wheelchair	18(s)+70(sta)+1(w)+1(d)

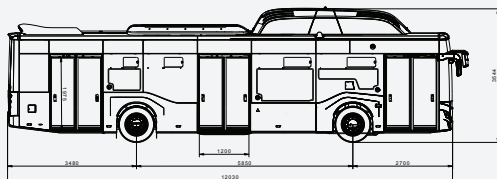

## EQUIPMENTS

<b>Heating and Ventilation</b>	
Pre Heater	Opt
<b>Air Conditioner</b>	
Digital Air Conditioner	S
A/C With Heater	Opt
<b>Safety &amp; Driving Comfort</b>	
Speed Limitor	S
Tachograph (Smart)	S
Tachograph (Digital)	Opt
Rear View Camera	S
Interior Camera	S (Inc. DVR)
Exterior Camera	S
Multiplex System	S
ABS	S
ASR	S
EBS	S
Bus Stop Brake (BSB)	S
Hillholder	S
Retarder	S
Parking Sensor	S
Spare Wheel	S
Tyre Inflation Unit	S
Reverse Gear Warning Beeper	S
Engine Compartment Fire Detection System	
Engine Compartment Fire Detection and Automatic	
Fire Supression System	Opt
Automatic Engine Oil Refill System	Opt
Fog Lamps	S (Front and Rear)
Day Time Running Lamps (DRL)	S
Locking System	S, (Opt: Square Lock)
<b>Exterior</b>	
Metallic Paint	Opt
Side Stripe Stickers	Opt
Skid Plate	S
Towing Device	S
<b>Doors</b>	
Number of Service Doors	3 Doors
Type of Service Doors	DoubleWing Air Actuated Interior Movement for All Front, Middle and Rear Doors Side Kneeling System and Ramp
Wheelchair Ramp	S
Wheelchair Ramp Sensor	S
Remote Control	S (Front Service Door)
<b>Windows</b>	
Type	Non-sliding, 1/4 Hinged Passenger Windows, Single Piece (S), With Slider, Double Piece (Opt) Single Glazed (S), Double Glazed (Opt)
Layers of Glass	
<b>Interior</b>	
<b>Driver Seat</b>	
Driver's Seat	Air Actuated, Adjustable
Steering	Adjustable Steering Wheel
Side Mirrors	Electrically Controlled , Heated
Driver's Cabin	Semi Glass (S), Full Glass (Opt)
Driver Overhead Cabinet	S
Coathanger for The Driver	S
Ticket Validator Preparation	Opt
<b>Passenger Compartment</b>	
Handrail Bars	Yellow (S), Grey (Opt), Stainless (Opt)
USB Charger for Passangers	Opt
<b>Lightening &amp; Signalization</b>	
Digital Destination Display	Slither Route Display is (S) Rear Route Indicator Panel is (S) Colored Front Route Indicator Panel is (Opt)
<b>Audio &amp; Visual</b>	
Radio System	Radio, USB, MP3 (S)
Monitor / LCD Screen (Passenger Compartment)	S
Digital Clock	S
Wifi Preparation	0
Wifi (Internet) Router	0
Driver Speaker	S

\*\*If selected 1175L, max. height of vehicle will increase

**S:** Standard **Opt:** Optional

\* Different seating variations are available.